


GLUING SOLUTIONS



meler 

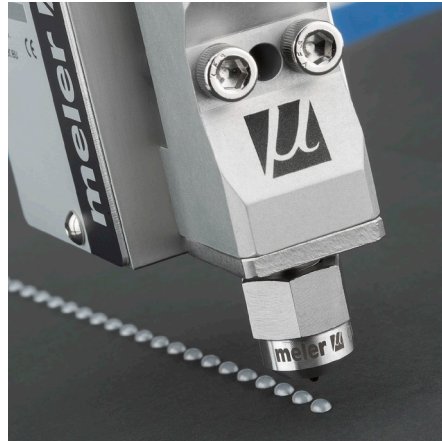

S-BEAM NOZZLES

- The **S-BEAM** Nozzle series for beads (dots and lines) guarantees application repeatability.
- A wide range of nozzle diameters and projection lengths facilitate the right nozzle selection for each application.
- The manufacturing process, subject to the highest quality standards, assures maximum dosage precision in each application.
- Nozzles can be exchanged easily maintaining the same level of performance at all times.
- A laser classification and marking system allows perfect identification of the selected nozzle type.

				
STF (STRAIGHT FIXED)	RA (RIGHT ANGLE STANDARD)	RAR (RIGHT ANGLE ROUND)	RAL (RIGHT ANGLE LONG)	STR (STRAIGHT ROTATABLE)
Number of outputs: 1	Number of outputs: 1 / 2	Number of outputs: 1 / ... / 8	Number of outputs: 1	Number of outputs: 1 / ... / 8
Length (projection): 1.3				Length (projection): 1.5
Diameter: 0.20 / 0.25 / 0.30 / 0.35 / 0.40 / 0.45 / 0.50				Diameter: 0.20 / 0.25 / 0.30 / 0.35 / 0.40 / 0.45 / 0.50 / 0.55 / 0.60 / 0.70 / 0.80 / 0.90 / 1.00
Length (projection): 1.9 / 4.0				—
Diameter: 0.20 (*) / 0.25 (*) / 0.30 / 0.35 / 0.40 / 0.45 / 0.50 / 0.55 / 0.60 / 0.70 / 0.80 / 0.90 / 1.00 (*) only for length 1.9				—
—	—	—	Nozzle length: 15 / 20 / 25 / 30	—
—	Angle: 15 / 30 (two outputs)	Angle: 0 / ... / 180	—	Angle: 15 / 30 / 45 / 60 / 90 (L: line / C: circle)

For more information speak with your Focke Meler representative:

meler 

Focke Meler Gluing Solutions, S.A.
Pol. Arazuri-Orkoien, c/B, nº3 A
E-31170 Arazuri - Navarra - Spain
Phone: +34 948 351 110
info@meler.eu - www.meler.eu

Focke Group

CE



Management
System
ISO 9001:2008

www.tuv.com
ID: 9105030748